


## **CSi-2000-LAT Dell Latitude 12 Rugged Tablet**



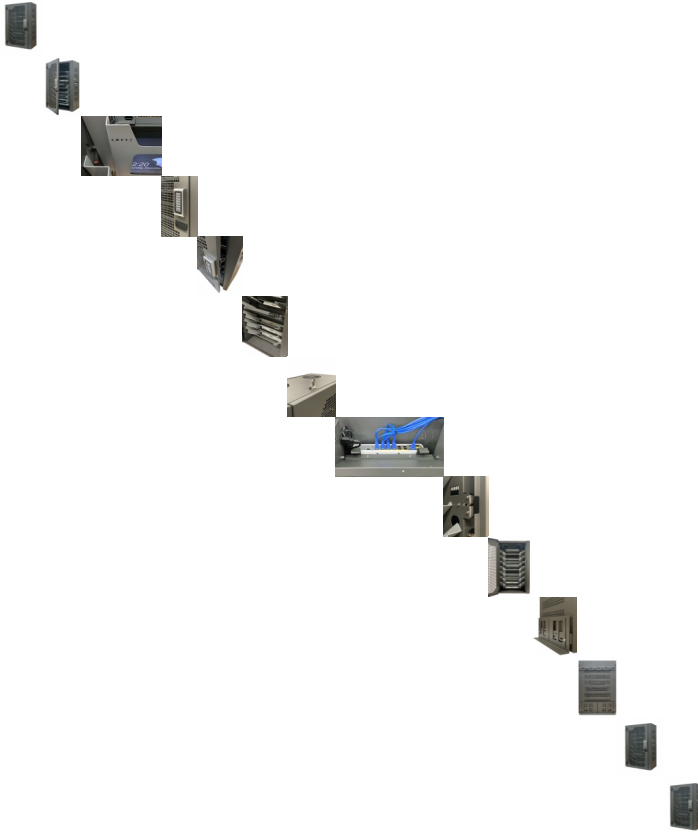

CSi-2000-LAT12 Grab & Go Charge and Networked wired Security Cabinet designed for 7 Dell Latitude 12 Rugged Tablets with Handle. Dimensions 21.8" W 12.7" D x 32" H. Leveling Feet, table-wall mounting brackets included.

Rating: Not Rated Yet

**Price**

7 Days

★ ★ ★ ★ ★

[Ask a question about this product](#)

Description

CSi-2000-LAT12 Tablet Cabinet  
For Dell Latitude 12 Fully Rugged Tablets with handle

Description

The CSi-2000-LAT12 Grab and Go cabinet is designed specifically for up to 7 Dell Latitude 12 ruggedized tablets. The grab-and-go style cabinet allows the user to take-out and return tablets without having to worry about plugging them in. Tablets are connected to the cabinet through the proprietary Pogo connector allowing A/C power and network access. To ensure the devices are charged and up to date with software patches the cabinet can accommodate an optional 8 port Cisco switch. This small form factor cabinet is ideal for areas with limited space and can be attached to a wall

using the supplied mounting bracket.

### Features

- Supports up to 7 Dell Latitude 12 Fully Rugged Tablets with Handlebar
- Grab-and-Go design makes removal and return fast and easy
- Proprietary Pogo connector eliminates cable mess and connection failure
- Power and Network (Cat 6 Wiring) provided to each slot/ dock
- Top lockable compartment can accommodate a Cisco 8 port switch
- Hinged door with keypad entry
- Thermostatically controlled fans in top lid

### Cabinet Specifications

Cabinet is designed to only be used with Dell Latitude 12 Fully Rugged

### Tablets

- Model Number: ZCSI-LAT12
- Cabinet Dimensions: 32"H x 31.8"W x 12.7"D
- Cabinet Weight (Empty): 75 lbs
- Cabinet Max Weight: 120 lbs
- Operating Temperature: 10 - 32+ degrees Celsius
- Wall Mount: Wall Mounting Brackets Supplied

### Cabinet Power Specifications

Cabinet Power Supply is UL Approved

- Voltage: 110VAC or 220VAC
- Current: 12 amps
- Circuit Breaker: 15A (max)
- Frequency: 47-63 Hz
- Overload Protection: Automatic Shutdown and Restart
- Overheat Protection: Automatic Shutdown and Restart

### Docking Slot Specifications

- Docking Station Connector: Proprietary Pogo 24-pin Connector
- Power: 19v DC
- Network: 10/100/1000 base-T Ethernet

### Fan System Specifications

- Fan Size: Dual 120mm x 120mm
- Airflow: 108 CFM | 126 m3/h (@ 1,350 RPM)
- Noise Level: 0.3 Sone (@ 1,350 RPM)
- Thermostat: Activated by temperature controller when above 86 Deg F. Foam replaceable debris filters available for each fan

Where to Buy Charge Solutions Inc. Products in the United States

**Contact Charge Solutions Inc. direct to obtain pricing, GSA Pricing Available.**

Charge Solutions Inc.

855-423-3435

[info@chargesolutionsinc.com](mailto:info@chargesolutionsinc.com)

y

