ZH-1000L for Dell Latitude 12 Rugged Tablet







CSI – ZH-1000LAT12 Grab & Go Charge and Networked wired Security Cabinet designed for 8 Dell Latitude 12 Rugged Tablets. Dimensions 18.65" W 11.19" D x 32" H. Wall mounting brackets included.

Rating: Not Rated Yet

Price

7 Days

Ask a question about this product

Description

ZH-1000LAT12 Tablet Cabinet For Dell Latitude 12 Fully Rugged Tablets

Description

The ZH-1000LAT12 Grab and Go cabinet is designed specifically for up to 8 Dell Latitude 12 ruggedized tablets. The grab-and-go style cabinet allows the user to take-out and return tablets without having to worry about plugging them in. Tablets are connected to the cabinet through the proprietary Pogo connector allowing A/C power and network access. To ensure the devices are charged and up to date with software patches the cabinet can accommodate an optional 8 port Cisco switch. This small form factor cabinet is ideal for areas with limited space and can be attached to a wall using the supplied mounting bracket.

Features

- Supports up to 8 Dell Latitude 12 Fully Rugged Tablets
- Grab-and-Go design makes removal and return fast and easy
- Proprietary Pogo connector eliminates cable mess and connection failure
- Power and Network (Cat 6 Wiring) provided to each slot/ dock
- Top compartment can accommodate a Cisco 8 port switch
- Hinged door with single keyed lock
- Thermostatically controlled fans in top lid

Cabinet Specifications

Cabinet is designed to only be used with Dell Latitude 12 Fully Rugged

Tablets

- Model Number: ZH-1000LAT12

- Cabinet Dimensions: 32"H x I 8.65"W x 12.2"D

- Cabinet Weight (Empty): 75 lbs

- Cabinet Max Weight: 120 lbs

- Operating Temperature: 10 - 32+ degrees Celsius

- Wall Mount: Wall Mounting Brackets Supplied

Cabinet Power Specifications

Cabinet Power Supply is UL Approved

- Voltage: IIOVAC or 220VAC

- Current: 12 amps

- Circuit Breaker: 15A (max)

- Frequency: 47-63 Hz

- Overload Protection: Automatic Shutdown and Restart

- Overheat Protection: Automatic Shutdown and Restart

Docking Slot Specifications

- Docking Station Connector: Proprietary Pogo 24-pin Connector

- Power: 19v DC

- Network: 10/100/1000 base-T Ethernet

Fan System Specifications

- Fan Size: 120mm x 120mm

- Airflow: 74 CFM I 126 m3/h (@ 1,350 RPM)

- Noise Level: 0.3 Sone (@ 1,350 RPM)


- Thermostat: 90 Degrees F - 100 Degrees F

RPM Curve: 400 RPM until 90°F, Up to 1,350 RPM @ IOO°F

Where to Buy Charge Solutions Inc. Products in the United States

Contact Charge Solutions Inc. direct to obtain pricing, GSA Pricing Availble. Charge Solutions Inc.

855-423-3435

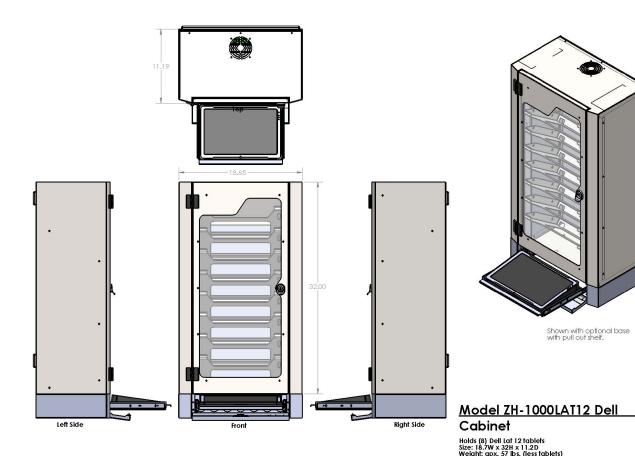

5 year warranty





